


12896 Mobile SMS

Ali is known as very much stingy. He bought an old second-hand mobile phone. He usually uses the mobile phone to receive phone calls from others and rarely makes a phone call. Suddenly, he observes that sending a mobile SMS is much cheaper than making a phone call. So he always sends a mobile SMS instead of making a phone call. Currently, his mobile phone display has got a problem that it shows nothing on the screen. It is difficult for him to write a mobile SMS. But he knows the number arrangement of his mobile keypad. Now he asks your help to find out the text he has keyed in while writing the SMS. He will let you which key he has pressed and how many times. The keypad arrangement of his mobile is given in the following picture; ‘_’ represents the space.

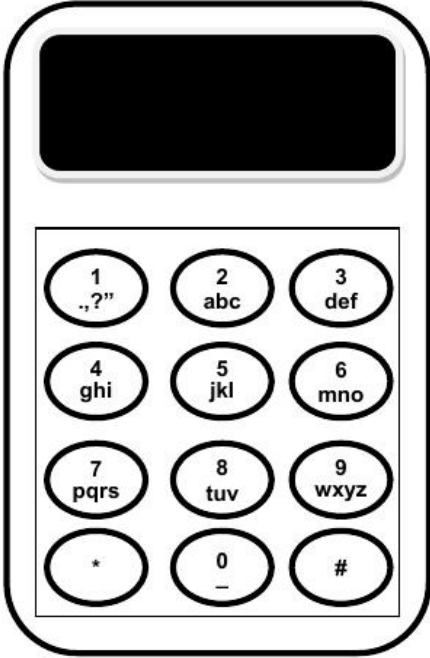

Input

The input file consists of several test cases. The first line of the input file contains a single integer $T < 1000$ indicating the number of test cases. Then T test cases follow. Each test case starts with a positive integer $5 \leq L \leq 100$, which is the length of the message. Each of the next **two** lines contains L positive integers. First line contains $0 \leq N_i \leq 9, 1 \leq i \leq L$ and second line contains $1 \leq P_i \leq 4, 1 \leq i \leq L$. N_i are the keypad numbers which he types and P_i represents how many times he presses the N_i key.

Output

For each set of input produce one line of output *message*, where *message* indicates the desired mobile SMS. See the sample input output for further clarification.

Sample Input

```

2
17
9 3 5 2 6 6 3 0 8 6 0 4 4 8 7 2 1
1 2 3 3 3 1 2 1 1 3 1 3 3 2 1 3 1
12
4 6 9 0 2 7 3 0 9 6 8 1
2 3 1 1 1 3 2 1 3 3 2 3

```

Sample Output

```

welcome to iiupc.
how are you?

```